

ADS120F Series

120Watts, Single Output



T Version

E Version

Dimensions: 100(D)x57(W)x107(H) mm

Features

- High power density
- Universal input range
- Convection cooled
- RoHS compliance
- 3 year warranty
- Great reliability
- DIN Rail / Wall bracket mounting solution
- Optional alarm signal / Redundant function
- Over voltage protection
- Overload protection
- Short circuit protection

Safety Standards



EN 60950 (Marking)


EMC Standards

EN55011	Class B
EN55022	Class B
EN61000-4-2	Level 3
EN61000-4-3	Level 3
EN61000-4-4	Level 3
EN61000-4-5	Level 3
EN61000-4-6	Level 3
EN61000-4-8	Level 3
EN61000-4-11	Level 3

Model List

Model	O/P Voltage Adjustment	Min.	Rated	Max.	Ripple Noise	Load Reg.	Efficiency	Over Voltage Protection
ADS120-12F(T/E)	+12VDC±10%	0A	10.0A	10.0A	100mVp-p	2%	84%	15~17VDC
ADS120-24F(T/E)	+24VDC±10%	0A	5.0A	5.0A	150mVp-p	1%	87%	27~30VDC
ADS120-48F(T/E)	+48VDC±10%	0A	2.5A	2.5A	250mVp-p	1%	88%	52~57VDC

Model Encoding

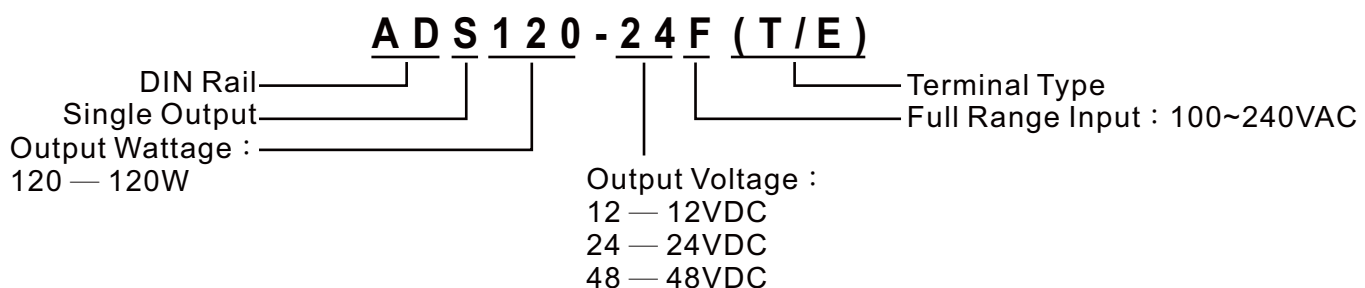

Website: <http://www.acro-powers.com/>
 E-mail: service@acro-powers.com
 Tel: +886-2-22675015 Fax: +886-2-22674939

ACRO
ENGINEERING INC.


Specification

General		
Switching Frequency		85k Hz
Isolation Voltage	Input-Output	3000 VAC/4242 VDC
	Input-FG	1500 VAC/2121 VDC
	Output-FG	500 VAC/710 VDC
Isolation Resistance		100MΩ when Input-Output @500VDC
Operating Temperature		-40°C~40°C ambient
Derating		2.5% per degree from 40°C to 60°C
Storage Temperature		-40°C to +85°C
Relative Humidity		5%~95% RH, Non-condensing.
Temperature Coefficient		±0.04% of output voltage per° C
MTBF		60,000hrs Min. Per MIL-HDBK-217F, 25°C GB
Altitude During Operation		2000m
Installation position		Vertical
Vibration		Random vibration, 10~500Hz, 3 axise
Input		
Input Voltage		100~240VAC/120~370VDC
Input Frequency		47~63 Hz
Inrush Current (cold start)		22A/115VAC 44A/230VAC
Rated Input Current		2.5A Max., Vi=100~240VAC
Leakage Current		Input-output 0.25mA, Input-FG 3.5mA, Vi=250VAC
Output		
Output Voltage accuracy		±1%
Minimum Load		0%
Line Regulation		±1%, measuring from low line to high line at rated load.
Load Regulation		See model list, measuring from 20% to 100% of rated load at 230VAC input.
Voltage Trim Range		±10%
Rated Continuous Loading		10A@12VDC, 5A@24VDC, 2.5A@48VDC
Hold Up Time		35mS Min., Full load@230VAC.
Turn On Time		1300ms
Rise Time		13ms
Fall Time		25ms


Specification

Output		
Transient Response	Recovery Time	2mS, Load change 50% to 100%
	Voltage Deviation	5%, Load change 50% to 100%
Efficiency		See model list, measuring at rated load and 230VAC input.
Ripple and Noise		See model list, measuring by using a 0.1 μ F/630V metalize capacitor and a 47 μ F electrolytic capacitor parallel on the test point, at rated load and 230VAC input.
Protection		
Input Fuse		3.15A/250v
Internal Surge Load Protection		Varistor, IEC6100-4-5
Degree of Protection		IP20
Short Circuit Protection		Autorecovery
Over Voltage Protection		Autorecovery
Rated Over Load Protection		160~200%
Overload protection		Power limited

Derating Curve

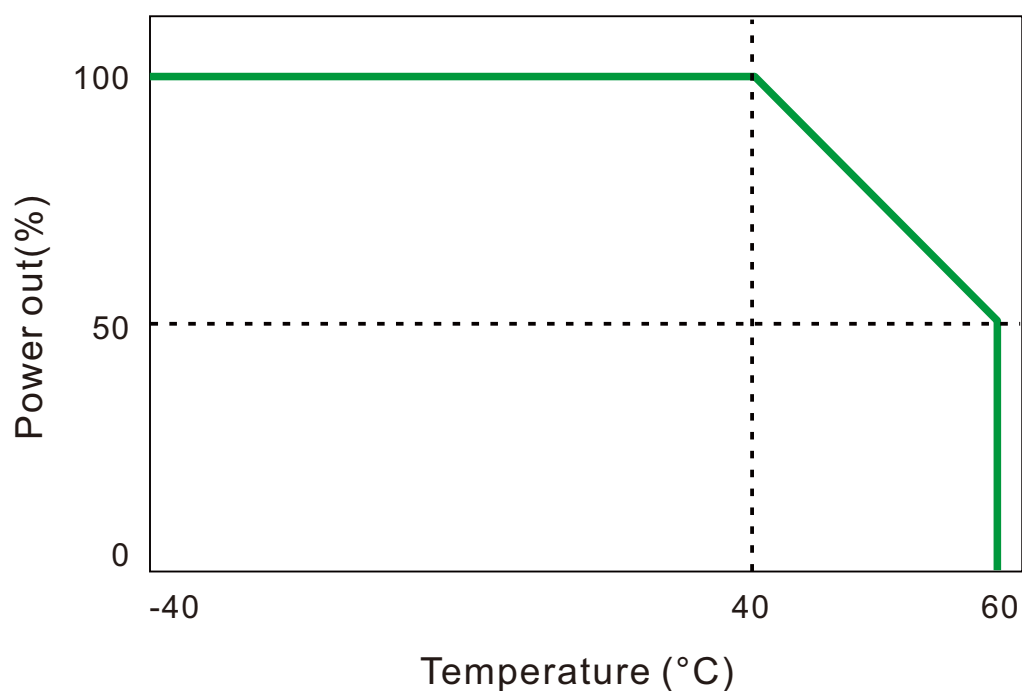

Mechanical Details

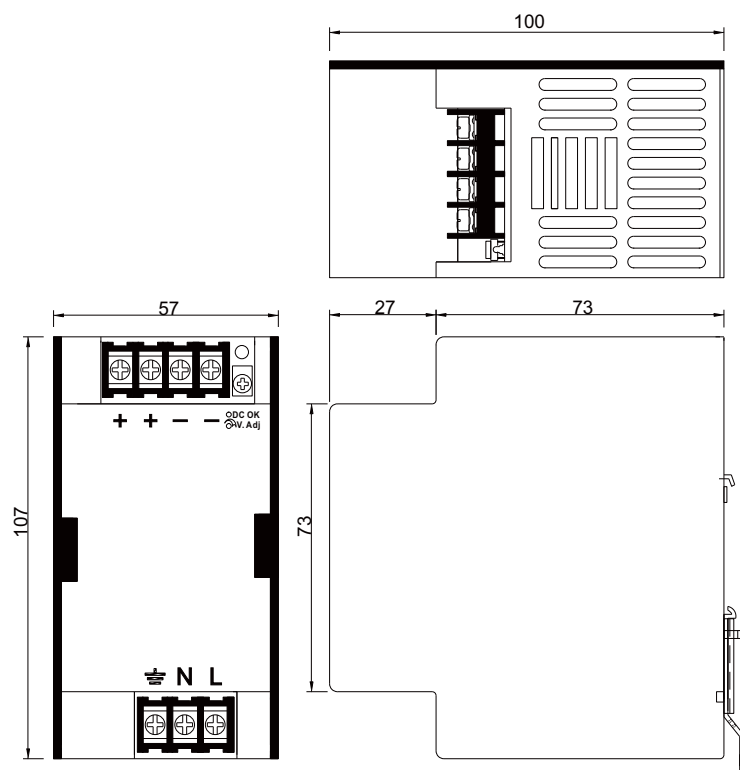


Dimensions	100(D)x57(W)x107(H)mm
Case Material	1.2mm Aluminum&Plastic

Terminal Allocation

Designation	Description
DC OK	Green LED Indicator
V Adj.	O/P Voltage adjustment
+	Output Positive
-	Output Negative
⏏	Earth
N	Input Neutral
L	Input Line

Installation instruction

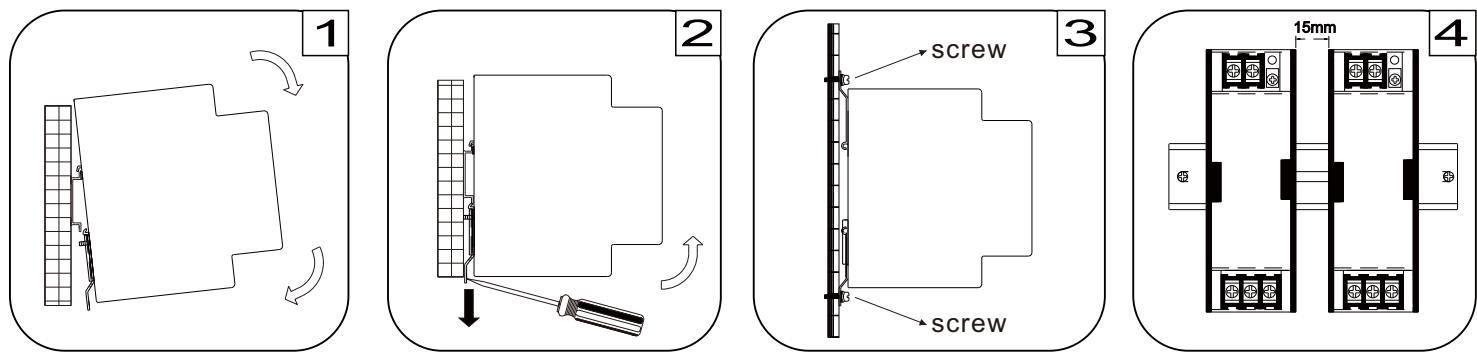

Place the top of the ADS120F rail mount over the top of the DIN rail. Tilt the bottom of the ADS120F toward the DIN rail until it snaps into place.

To remove the ADS120F from the DIN rail, use a flathead screwdriver to pull down the bottom of the rail mount and tilt it away from the DIN rail.

To install ADS120F on wall/plate, pulling both mounting brackets out first. Then screwing the two brackets with screws onto wall/plate.

The vents of housing is designed for dissipating heat, please keeping a minimum distance of 15mm from each other.