

MVSC-460 系列

電磁閥



特點介紹



選用表



連座擋板



技術資料



注意事項

(安裝前閱讀)




規格

型號	3E1	3E2	4E1	4E2	4E2 C.P.R	
配管口徑代號	15A					
配管口徑尺寸	1/2					
方口數	3 口		5 口			
位置數	2 位置			3 位置		
使用流體	空氣					
使用壓力範圍	0.2~0.8 MPa			0.3~0.8 MPa		
使用壓力範圍 (LP)	0~0.8 MPa					
引導壓力範圍 (LP)	(0.34×P(*1)+0.1)~0.5 MPa					
耐壓力	1 MPa					
有效斷面積	60 mm ²		50 mm ²		30 mm ²	
周圍溫度	-5~+50°C (不凍結)					
應答時間	50 ms					
定格電壓	AC110V, 220V, 24V (50/60)Hz, DC24V, 12V					
電力消耗	標準型	AC=4.8/4.4VA, 6/4.9VA, 6.7/5.4VA, DC=2W, 2.5W				
	節能型	DC24V= 啟動：2W (切換時間 100ms) 節能：0.5W				
電壓容許範圍	±10%					
絕緣等級	F 級					
重量 (g)	閥	325	455	339	464	525
	連座	131n+84 (*2)		145n+91 (*2)		

*1. P: 使用壓力 *2. n: 連座數

閥 / 訂購代號

MVSC - 460 - 4E2C - NC - AC110 - L - LP - NPT

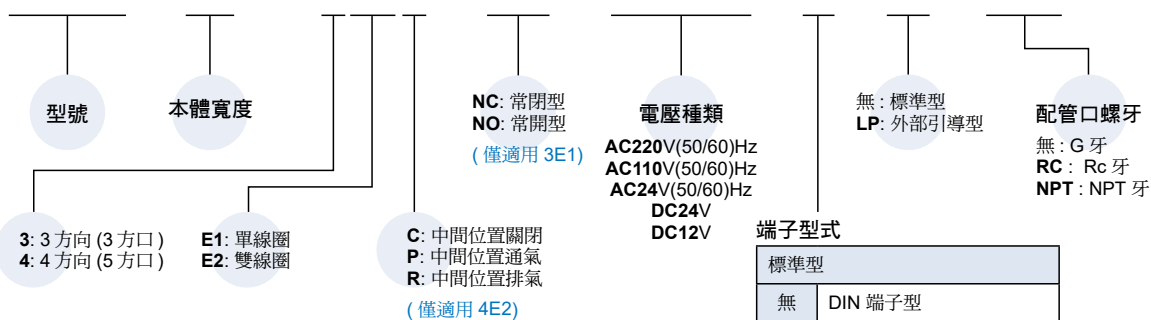

連座 / 訂購代號

MVSC - 460 - 5B3 - NPT

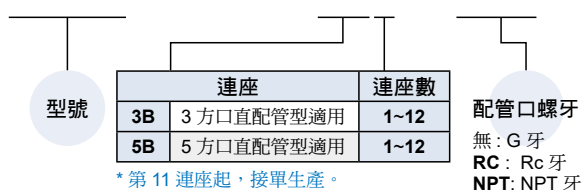


表 1
防爆型規格



防爆等級	Ex mb IIC T4 Gb
定格電壓	AC110V / 220V(50/60)Hz, DC24V
電力消耗	AC110V=4.5VA, AC220V=4.8VA, DC=5W
電壓容許範圍	±10%
絕緣等級	F 級
線長	3 m

MVSC-460 外觀尺寸



電磁閥



MVSC-460-4E1

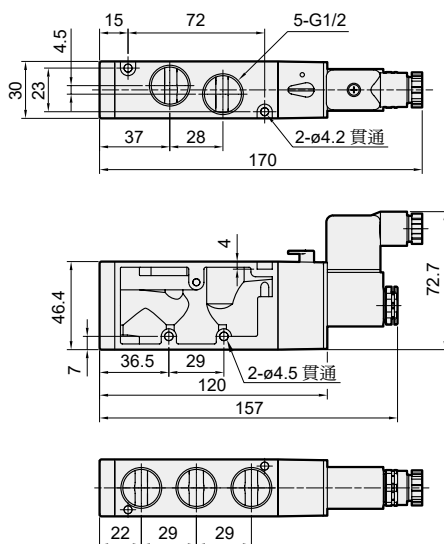


MVSC-460-4E2

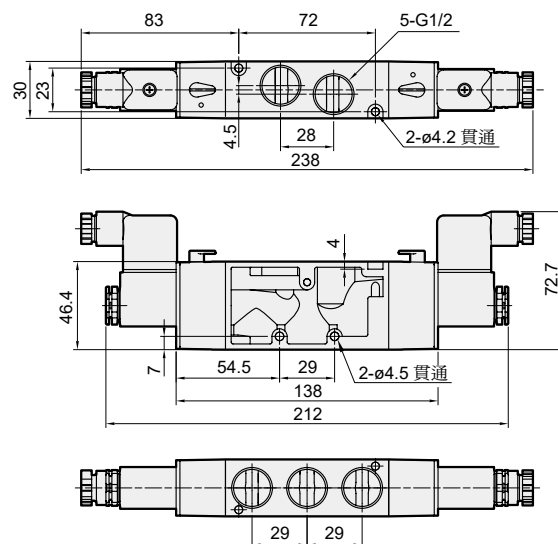


MVSC-460-4E2C.P.R



MVSC-460-4E2C



MVSC-460-4E2P




MVSC-460-4E2R

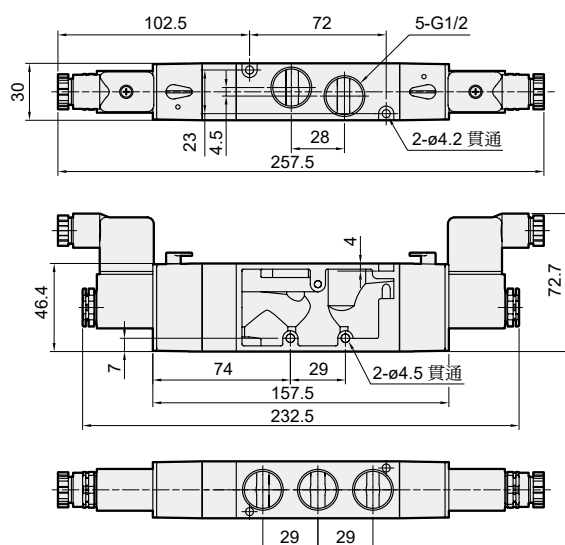


流量特性圖

MVSC-460-3E1/3E2

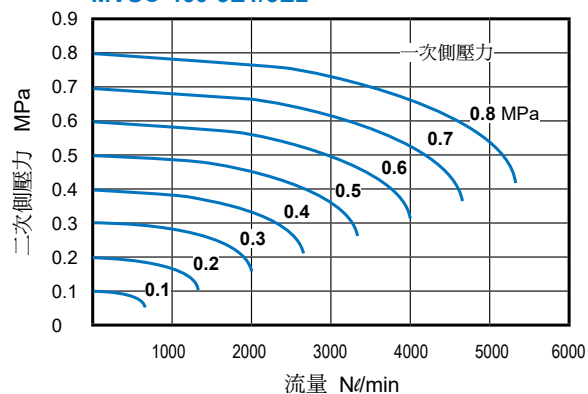

MVSC-460-4E1/4E2

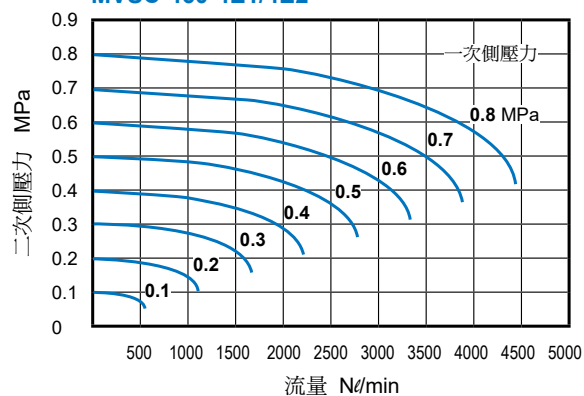


MVSC-460 外觀尺寸 / 連座

電磁閥







MVSC-460-3E1-NC/NO





NC



NO

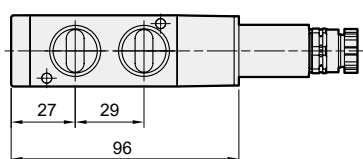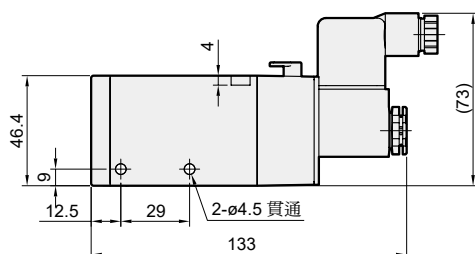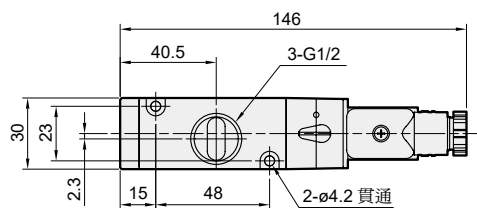

MVSC-460-3E2

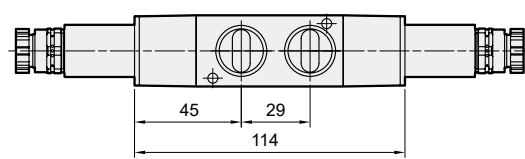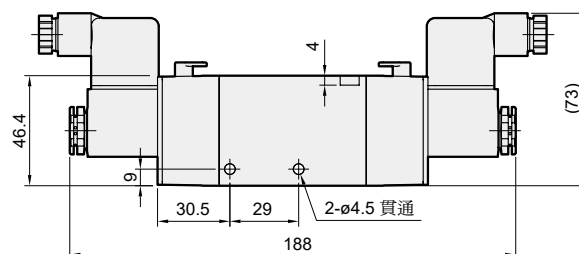
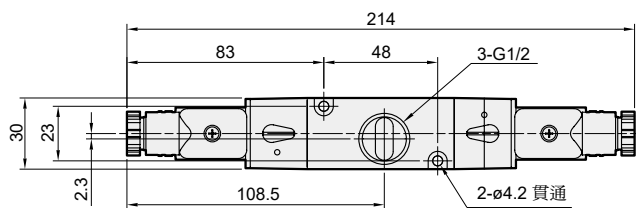



連座外觀尺寸

MVSC-460-3B*

3 方口直配管型用

LP

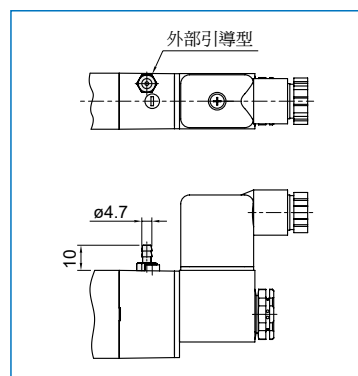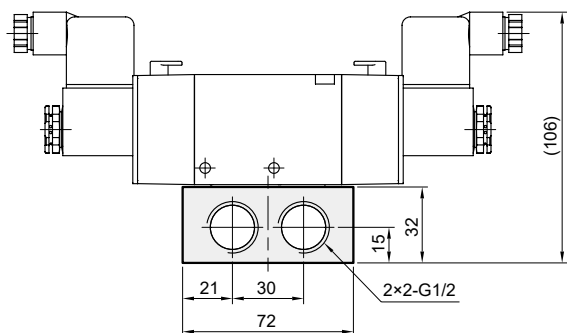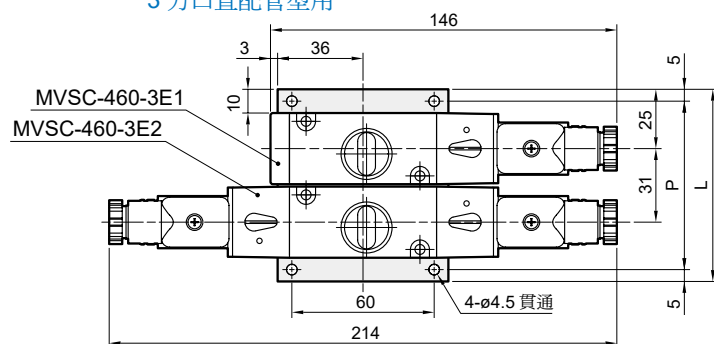

連座數	P	L
1	40	50
2	71	81
3	102	112
4	133	143
5	164	174
6	195	205
7	226	236
8	257	267
9	288	298
10	319	329

P: (連座數 - 1) × 31 + 40
L: (連座數 - 1) × 31 + 50


MVSC-460 連座

電磁閥



MVSC-460-5B*

5 方口直配管型用

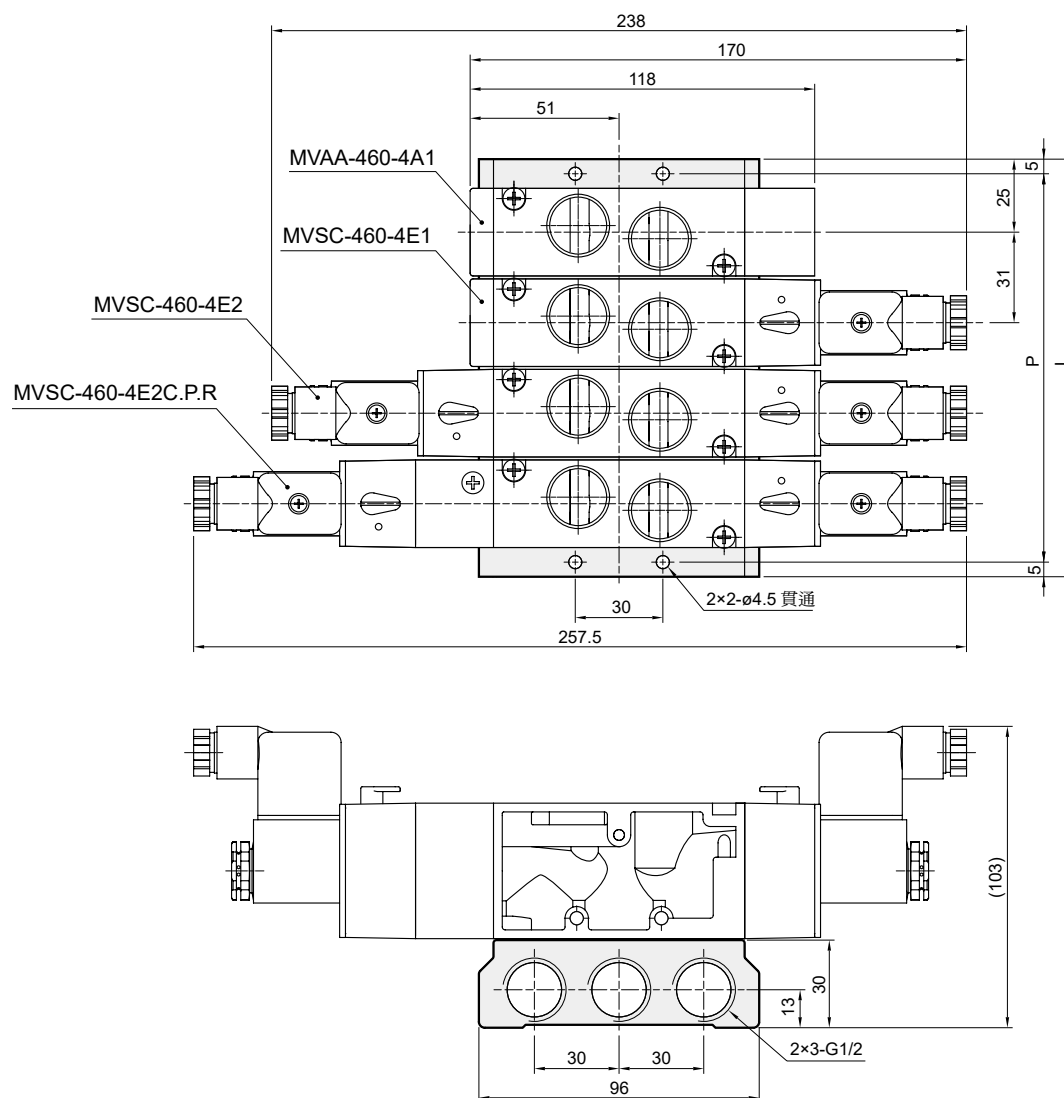

連座數	P	L
1	40	50
2	71	81
3	102	112
4	133	143
5	164	174
6	195	205
7	226	236
8	257	267
9	288	298
10	319	329

P: (連座數 -1)×31+40

L: (連座數 -1)×31+50